

Digital MAURER Pyrometer

KTRD 1465-HS

Measuring ranges 150 to 1200°C

HIGH-SPEED UNIVERSAL DEVICE

with Fiber Optic Cable

Laser application



Performance, precision and reliability - you can count on MAURER pyrometers. Benefit from maximum adaptability by choosing the right optics, accessories and the appropriate interface. Thus our pyrometer fits perfectly into existing systems. For tight spaces, this pyrometer is equipped with a fiber optic cable and an attached optic system.



The most important **features** and **characteristics** at a glance:

- Spectral range: 2,1 µm
- **Ultra short response time of 100 µsec**
- Emissivity from 100 – 10 %, adjustable directly at the pyrometer or via interface
- **Green target light (LED)** that is exactly identical to the actual measuring spot in position and size
- With **fiber optic cable and optic system** for exact focusing even in narrow spaces
- Use with **digital and analogue output**
- **1 limit output** (open collector)
- Operating voltage **24 V DC**
- **Free software** (IR-LOG) for parameter setting, data recording and storage

Measuring Ranges

1. 150 – 800 °C
 2. 200 - 1200°C
- Special measuring ranges upon request -

Scope of Applications

Processing of steel, iron, non-ferrous metal, wires and ceramics; rolling, soldering, welding, transforming, induction heating; vacuum furnace etc.

Technical Data

Device type	KTRD 1465-1-HS
Target marking	Light beam aiming device with LED (green)
Response time	100 µsec
Spectral range	2,1 µm
Measurement uncertainty	0,5 % ± 1 °C (ε = 1, Tu = 23°C, T95 = 1 s)
Temperature dependence	0,05 % / °C
Reproducibility	0,1 % ± 1 °C (ε = 1, Tu = 23°C, T95 = 1 s)
Emissivity	100 – 10 %, adjustable directly at the pyrometer or via interface
Resolution	< 0,1 % at the analogue output < 0,1 °C at the interface
Operating / Storage temperature	0 – 50 °C, fiber optic cable and optics 150 °C / -10 °C – 70 °C 32 – 140 °F, fiber optic cable + optics 302 °F / 14 – 158 °F
Permissible humidity	35 – 85 % RH (non-condensing)
Analogue output	0 – 20 mA / 4 – 20 mA (Load max. 500 Ω)
Subranges	freely adjustable within measuring range
1 limit output (open collector)	24 V 100 mA
Interface	RS 232 ± 50 V isolated <u>or</u> RS 485 ± 70 V isolated Optional: PROFIBUS, PROFINET, Ethernet, EtherCAT, USB 2.0
Maximum value memory	Maximum memory, peak value memory double, adjustable time and threshold value, erasing after time, external contact, by software, after every measuring object
Supply voltage	24 V DC ± 10 %
Power consumption	< 100 mA
Device connection	12-pol. plug connector
Dimensions (LxHxW) / Weight	54 x 54 x 147 mm / 0,55 kg without fiber optic cable
IP Code	IP65

Fiber optic cables

Quartz fiber optic cable in metal hose, ambient temperature max. 150 °C, minimum bending radius = 200 x fiber thickness.

Both sides with FSMA-plug for connecting the pyrometer and the optic system. Custom-tailored lengths and other fibers available upon request.

Fiber thickness	For measuring range No.
Ø 0,2 mm fiber	1+2

Configurations

- Version with fiber optic cable: KTRD 1465
- Built-in digital display on the backside of the pyrometer

Main Equipment


Electronic Equipment		Mechanical Equipment:	
Connection cables	Power Supply 100-270 VAC – 24 VDC	Objectives	Mirror 90° for beam deflection
Electronic process units	PC-Box (USB-connection set)	Mounting parts	Blowing devices

Optics for MAURER pyrometers with fiber optic cable

Optic systems

OVERVIEW

Fix-Focus
M12x1

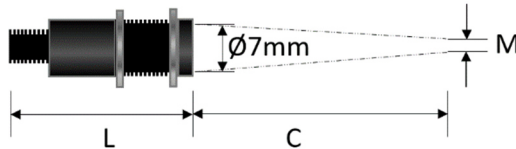


Legende

- L Length of optic
- C Measuring distance from optic front edge
- M Measuring spot size

Optics	C [mm]	L [mm]	Fiber Ø [µm]	M [mm]
VL 50-M 12	50	38	200	0,7
			400	1,4
			600	2,0
VL 100-M 12	100	40	200	1,0
			400	2,0
			600	3,0
VL 150-M 12	150	38	200	1,4
			400	2,7
			600	4,0
VL 200-M 12	200	38	200	2,0
			400	4,0
			600	6,0

Vario-Focus
Ø 18 mm

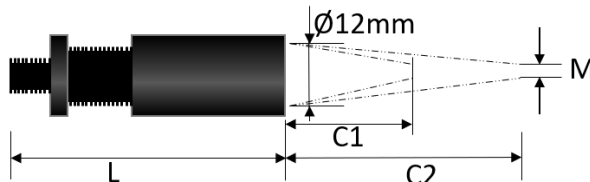


Legende

- L Length of optic
- C Measuring distance from optic front edge
- M Measuring spot size

Measuring spot size M (mm) = $\frac{\text{Measuring distance (mm)}}{\text{distance ratio}}$ z.B. $\frac{C=150 \text{ mm}}{D=75} = \text{Ø } 2,00 \text{ mm}$

Optics	C1 [mm]	C2 [mm]	L [mm]	Fiber Ø [µm]	D Distance ratio
VL-VA N	65	160	46 – 56	200	138
				400	69
				600	46
VL-VA T	100	5000	46 – 56	200	150
				400	75
				600	50

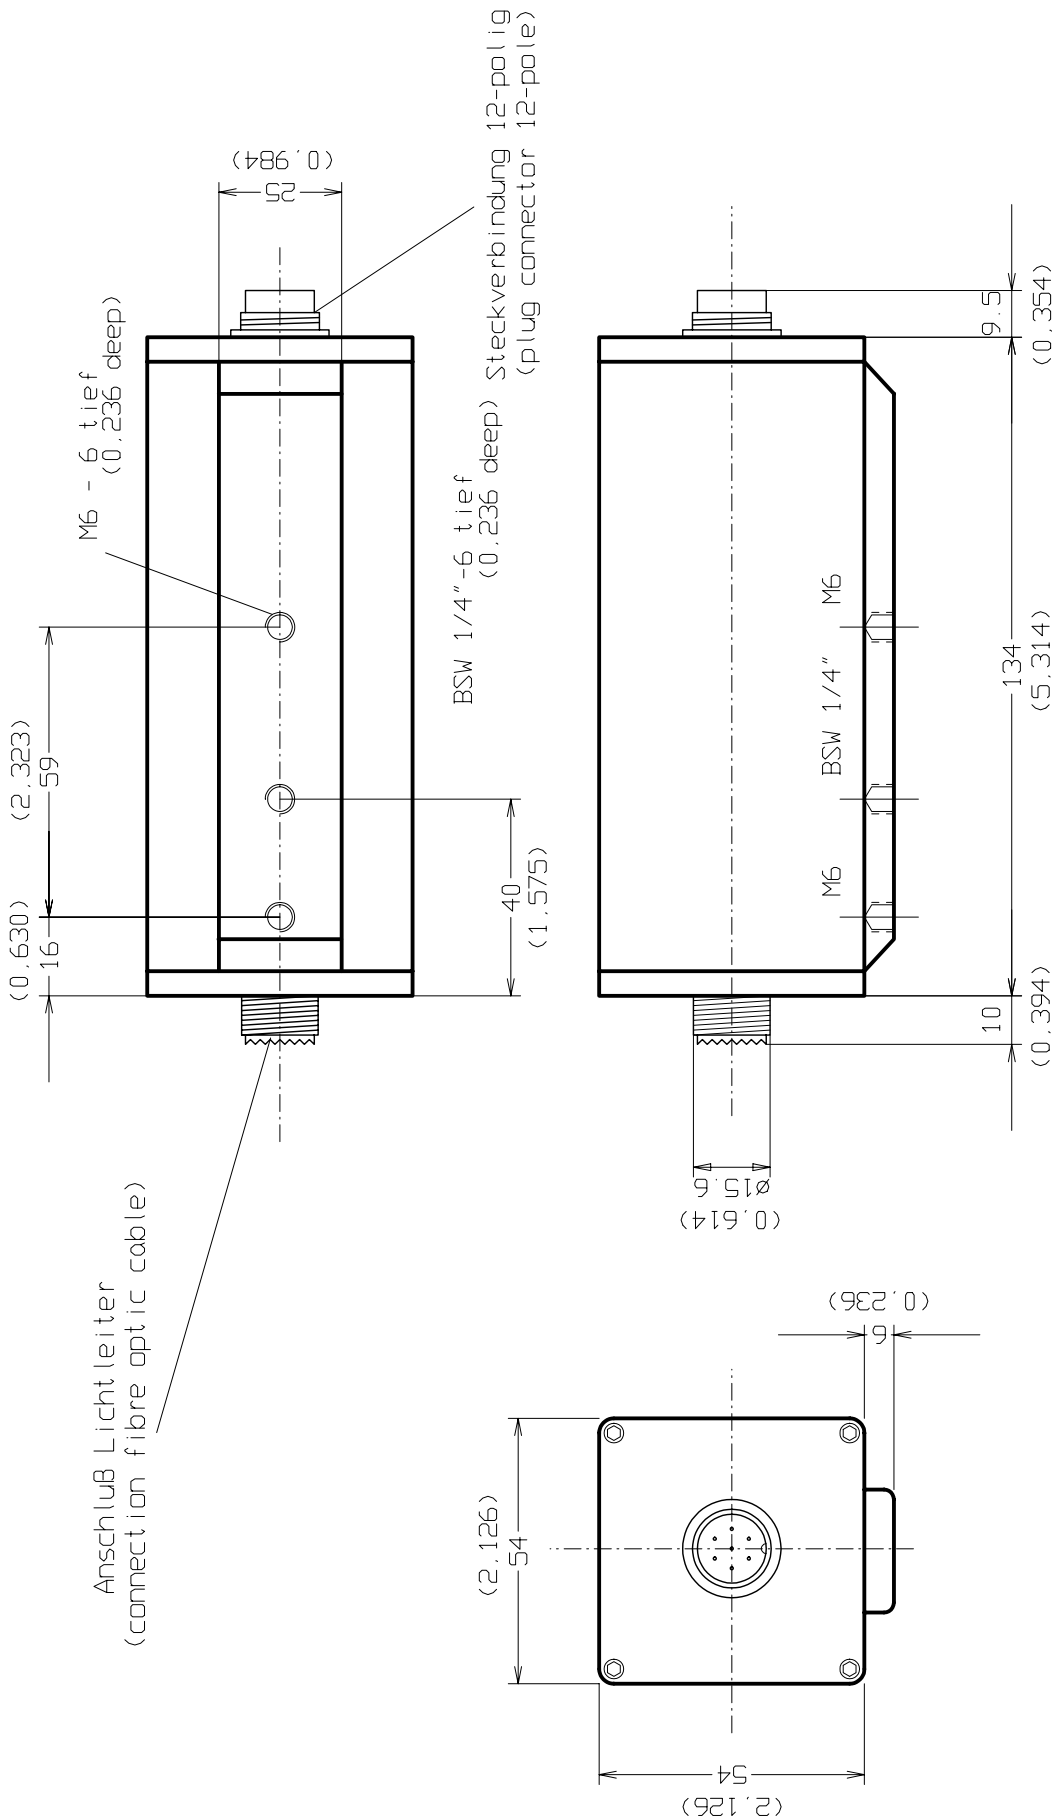

(xxx) - Maße in Zoll
(dimensions inch)

Maßstab 1:1		Fa.Dr. Maurer GmbH	
		STANDARDGEHÄUSE (standard case)	
		KTRD 1400	
		091103	
		Blatt	
		Bl.	
Zust.	Änderung	Datum	Name